



# Multi-Channel Event SEQUENCER

DESIGNED FOR MISSION CRITICAL APPLICATIONS

INVOCON, INC.

TECHNOLOGY PROFILE MAR 2011

Invocon's event sequencer is a flight qualified solution for monitoring and initiating flight events.


It includes 8 channels of open drain outputs for assertion of timed events via relays or other devices. Each channel provides up to 3 Amps of current. The voltage level available at the output is equal to the sequencer's input voltage (20V to 40V). The event timer is triggered by a single input trigger. Each channel can be programmed independently with a timed event resolution of 1ms for a period of up to 4 hours after the input trigger.

Additionally, it contains 16 channels of analog input for monitoring switch positions, destruct tones, and various other signals. This can be expanded to 32 channels if desired.

Dual status output lines provide health and status information to umbilical and telemetry interfaces.

The three Sequencer interface connectors contain the following functions:

- Power
- Configuration (RS-232)
- Vehicle Interface / Relay Control
- Analog Data Acquisition
- Telemetry Interface (RS-422)
- Umbilical Interface (RS-422)
- Fiber Emitter
- Lanyard Input

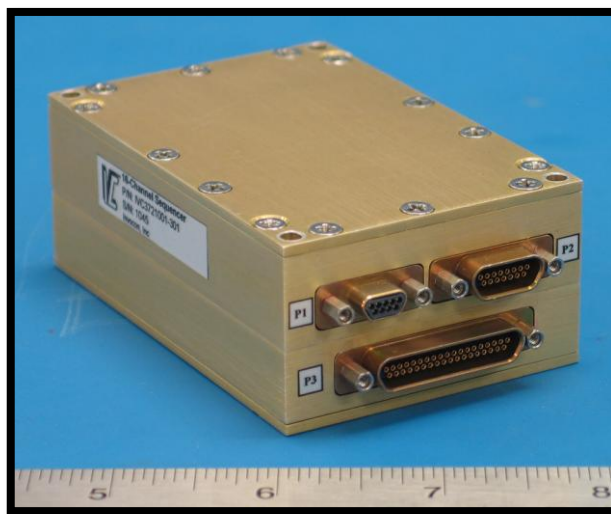

## Specifications for P/N: IVC3721001-301

<u>Electrical</u>	
Input voltage	20 – 40 VDC
Connectors	9 pin Micro-D 15 pin Micro-D 37 pin Micro-D
<u>Mechanical</u>	
Size (L x W x H)	3.3 x 2.2 x 1.28 inches (not including connectors)
Weight	0.55 Lbs.
Case material	6061 aluminum, Alodine coated
<u>Environmental</u>	
Operating Temperature	-24° to 61°C
Qualification Temperature	-34° to 71°C
EMI Qualification	MIL-STD-461 (100 Volts/meter)

System specifications subject to change without notice.

© 2011 Invocon Incorporated, All Rights Reserved.

Invocon, Inc. • 19221 I-45 South, Ste 530 • Conroe, TX 77385

www.invocon.com • (281) 292-9903